




Rotomolding Mixer

Reliance Rotomolding High Intensity Mixers run at 20M/S, which is the ideal speed to run Polyethelene Resin and Pigments. The units can be sized to run faster and supplied with a VFD to control the speed rate. A potentiometer or push button can be supplied to control the speed.

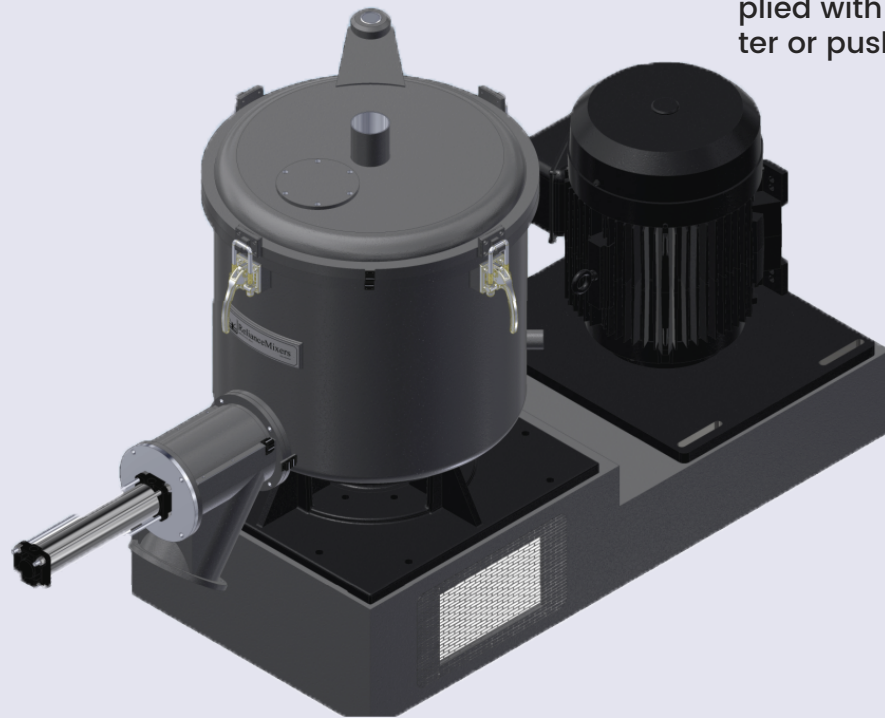

ADDITIONAL FEATURES & OPTIONS

- AISI 304SS Vessel, Lid & Discharge
- Pneumatic Lid & Discharge
- AISI 304SS Tools with Variant Design
- Temperature Sensor
- Safety Switches



Contact Us

Website: reliancemixers.com

Address: 1900 FM 1092
Missouri City, Tx 77459

Email: sales@reliancemixers.com

Custom Mixers for Custom Needs!



Available Features / Options:

- ☐ Mirror Finish
- ☐ View Port
- ☐ VFD in Control Panel
- ☐ PLC Panel

Model	Total Capacity	Fill Capacity	Motor HP
RFM200	200L	60%	30
RFM300	300L	60%	40
RFM400	400L	60%	50
RFM500	500L	60%	60
RFM600	600L	60%	60
RFM700	700L	60%	75
RFM1000	1000L	60%	100
RFM1200	1200L	60%	125
RFM1500	1500L	60%	150



Contact Us

Website: reliancemixers.com

Address: 1900 FM 1092
Missouri City, Tx 77459

Email: sales@reliancemixers.com

